

Temporary Area LED Lighting

08-00410

9,000 Lumen (75W)



FEATURES

- Built-In 5-15 Receptacle
- Powerful SMD LED
- LED Life Span of 50,000 hours
- Heavy Duty Metal Hook with Inset Fitting
- Corrosion Resistant Powder Coated Metal Guard
- Suitable for Covered Damp Locations

SPECIFICATIONS

- 9,000 Lumen/75 Watt
- SMD LED
- 5-15 Female Receptacle to connect additional lights
- 5-15 Plug
- 5000 Kelvin Color Temperature
- LED Driver Capable of 120/208/240/277 Volt, 50-60Hz
- 3 foot, 16/3 SJTW Power Cord
- Yellow
- Suitable for Covered Damp Locations
- cETLus Listed

PACK QUANTITY/UPC

- Pack Quantity = 1
- UPC# 8-03058-00410-1





08-00410
75W 9000lm



Build-in Receptacle



Milky Cover



Hook

· Product Information

Item NO	Lumen	Watt	Volts	CCT	CRI	PF	Life (L70)	Working Temperature
08-00410	9,000	75W	120VAC	5000K	80+	>0.9	50,000Hrs	-40-40 °C / -40-104 °F
Item NO	Beam Angle	Cables	Surge Protection	Pack Quantity	Dimension			
08-00410	120 degree	5ft	6KV	2pcs/ctn	φ180*H210mm / φ7.01*H8.27in			

- *LPW is Lumen Per Watt*
- *CCT (Kelvin) is the correlated color temperature*
- *CRI (Color Rendering Index) is the ability to represent the original color of a substance*
- *PF (Power Factor) is the ratio of the actual power consumed to the power supply capacity*
- *Life (L70) is service life of LED chips*


**LIMITED
WARRANTY**



P.S. 1. The driver of this work light can be worked at 120-277V. It can be used at other voltage instead of 120V only by removing the 5-15P, but this usage "will not" meet the UL/ETL product certification standard.


2. Any modified conversion to these luminaires will immediately void the warranty

· Dimension

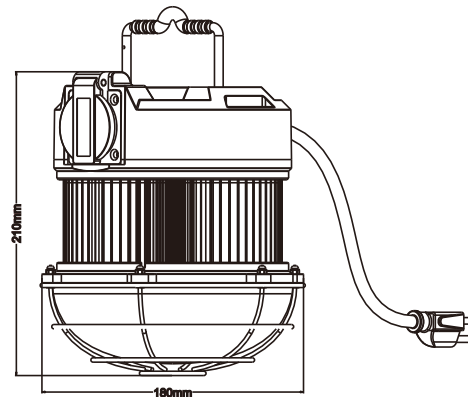

08-00410
75W 9,100lm

· Photometry

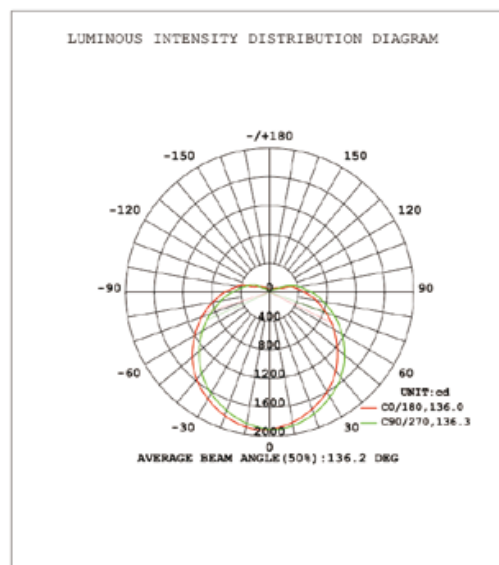

Voltec Power & Lighting
<https://www.voltec-industries.com/>

