



X300000

Extension Ladder WalkThru™

⚠ WARNING: Read and follow these instructions for installation and use.

WORK SAFE! WORK SMART!

IMPORTANT

Read and understand all labels on both the ladder and the Werner WalkThru before each use. Keep these User Instructions for reference.

PURPOSE

This device is designed to attach to the top end of rails of an extension ladder to extend ladder side rails above an elevated surface. The Werner WalkThru provides a handhold and walk through to assist the user mounting and dismounting the ladder.

COMPATIBILITY




The Werner WalkThru has been tested with the following Werner extension ladders.

Ladder	Duty Rating	
Type IAA	Special Duty	375 lbs
Type IA	Extra Heavy Duty	300 lbs
Type I	Heavy Duty	250 lbs
Type II	Medium Duty	225 lbs

The Werner WalkThru is not compatible with Werner Model 560-3n Type III or Multi-Purpose ladders.

USE INSTRUCTIONS

1. When installed on an extension ladder the Werner WalkThru serves as a 3 foot extension above the top support for access to an elevated surface.
2. Ladders with the Werner WalkThru installed must be set-up with the top rung at or below the upper support point and the top and bottom of the ladder secured against movement. This set-up permits the user to climb above the ladder's designated highest standing level to access an elevated surface.
3. Werner WalkThru provides a handhold and a means to step through the rail extensions for access to or egress from an elevated surface.
4. The Werner WalkThru must be used while facing the ladder during ascent, descent and transition to and from the upper support surface.

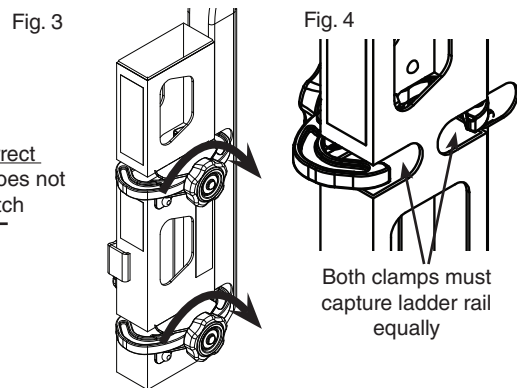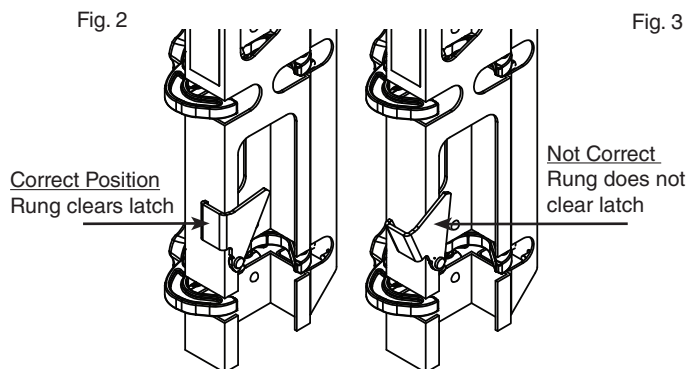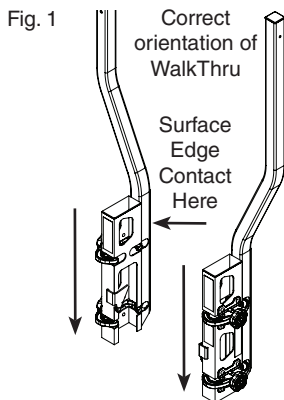

Model No.	Material	Length	Width	Weight	Compliance Standards
X300000	Aluminum Alloy	48 ¾ in (1,238 mm)	6 ½ in (165 mm)	11 lb (4.9 kg)	OSHA 1910 & 1926

USE LIMITATIONS

1. Werner WalkThru is not intended for use against a wall to extend the climbable length of the ladder.
2. Both sides of the Werner WalkThru must be used. Do not use the Werner WalkThru on only one rail of a ladder.
3. The Werner WalkThru must not be installed after the ladder is set-up in the climbing position. Never attempt to install or adjust WalkThru while on ladder.
4. Werner WalkThru must not be used without the top and bottom of the ladder secured against movement.
5. Remove the Werner WalkThru from ladder before transport. Werner WalkThru must not be attached to a ladder during transport.
6. Never pull the WalkThru to re-adjust ladder. Only adjust ladder from the ground.
7. The WalkThru is not rated for use as a fall protection anchor point. Tie off to upper landing surface once installed.
8. Do not rest WalkThru on a surface that fails to allow ladder locks to remain properly engaged. Always inspect ladder prior to climbing to be sure it is locked and secure.

INSPECTION

Carefully inspect Werner WalkThru daily before use for physical damage. Check for the following:

- Excessive signs of corrosion
- All fasteners are tight and secure
- Dents, cracks or metal deformation
- Labels are intact and legible

⚠ WARNING: If Werner WalkThru has been subjected to shock or impact forces, immediately remove from service.

INSTALLATION

1. Slide left and right rail extension over the top of each of ladder rail. Surface edge is to make contact on the extension rail upright. Fig. 1
2. Top ladder rung must completely clear latch. See Fig.2 for correct position.
3. Hand tighten each clamp by turning knob clockwise to lock rail extensions onto ladder rails. Do not over tighten. Fig. 3
4. Both clamps must capture ladder rail equally. Fig. 4

CLEANING AND MAINTENANCE

Werner WalkThru may be cleaned with a mild soap solution and dried completely. No additional maintenance or servicing is required.

User Instruction Manual



X3000001

Extension Ladder WalkThru Gate™

⚠ WARNING: Read and follow all ladder instructions for installation and use.

WORK SAFE! WORK SMART!

IMPORTANT

Before use, the user must read and understand these User Instructions. Keep these User Instructions for reference.

PURPOSE

This device is designed to attach to the Werner X300000 WalkThru. It opens to allow the user to walk through the rail extensions and closes to help prevent falls through the ladder extension opening from an elevated surface.

COMPATIBILITY

The Werner WalkThru Gate is only allowed to be attached the Werner X300000 WalkThru.

USE INSTRUCTIONS

1. The Werner WalkThru when installed on an extension ladder serves as a 3 foot extension above the top support for access to an elevated surface.
2. Ladders with the Werner WalkThru installed must be set-up with the top rung at or below the upper support point and the top and bottom of the ladder secured against movement. This set-up permits the user to climb above the ladder's designated highest standing level to access an elevated surface.
3. The Werner WalkThru provides a handhold and a means to step through the rail extensions for access to or egress from an elevated surface.
4. Werner WalkThru must be used while facing the ladder during ascent, descent and transition to and from the upper support surface.

USE LIMITATIONS

1. The Werner WalkThru is not intended for use against a wall to extend the climbable length of the ladder.
2. Both sides of the Werner WalkThru must be used. Do not use the Werner WalkThru on only one rail of a ladder.
3. The Werner WalkThru or WalkThru Gate must not be installed after the ladder is set-up in the climbing position.
4. Werner WalkThru Gates must not be used without the top and bottom of the ladder secured against movement.
5. Remove the Werner WalkThru from ladder before transport. Werner WalkThru must not be attached to a ladder during transport.

INSPECTION

Carefully inspect Werner WalkThru Gate daily before use for physical damage. Check for the following:

- Excessive signs of corrosion
- All fasteners are tight and secure
- Dents, cracks or metal deformation
- Labels are intact and legible


⚠ WARNING: If Werner WalkThru Gate has been subjected to shock or impact forces, immediately remove from service.

INSTALLATION

1. Align the WalkThru Gate bracket mounting holes to left rail extension. Install socket head bolts, lock washer, nut and tighten until lock washer is flat. Do not over tighten. Repeat for second mounting hole. Fig. A
2. Align mag-lock bracket mounting hole to right rail extension. Install socket head bolt, lock washer, nut and tighten until lock washer is flat. Do not over tighten. Fig. B.

CLEANING AND MAINTENANCE

Werner WalkThru Gate may be cleaned with a mild soap solution and dried completely. No additional maintenance or servicing is required.

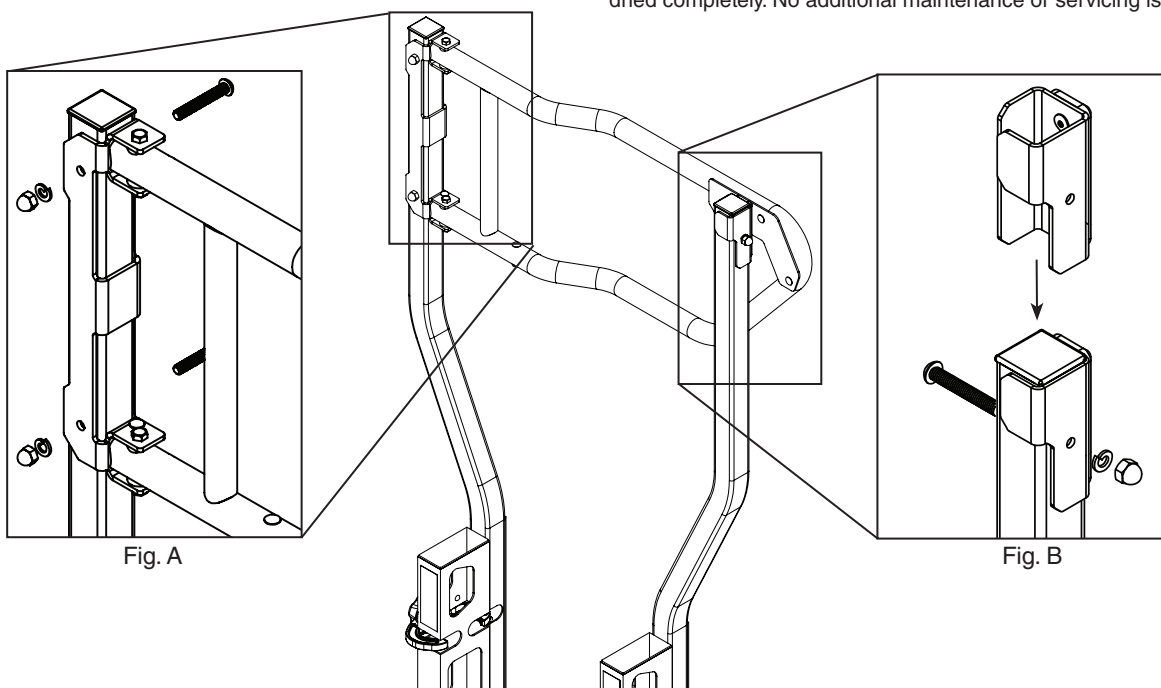

User Instruction Manual

Werner Co. Corporate Headquarters: 555 Pierce Road, Suite 300, Itasca, IL 60143

TEL: 888-523-3370 FAX: (724) 588-0315 www.wernerco.com